



产品规格书

PW6268(DFN5*6)

Datasheet of PW6268(DFN5*6)

深圳市银鹏威电子有限公司

Shenzhen Yinpengwei Electronics Co., Ltd.

Tel:0755-83995227/83995267/83995367

地址: 深圳市龙岗区坂田雪岗北路天安云谷3栋C座 704室

Address: 3C704, Tiananyungu building, Bantian road, Longgang District, Shenzhen, China



Yin Peng Wei Electronic

PW6268
60V N-Channel AlphaSGT™

General Description

- Trench Power AlphaSGT™ technology
- Low $R_{DS(ON)}$
- Low Gate Charge




Product Summary

V_{DS}	60V
I_D (at $V_{GS}=10V$)	44A
$R_{DS(ON)}$ (at $V_{GS}=10V$)	< 4.7mΩ
$R_{DS(ON)}$ (at $V_{GS}=4.5V$)	< 6.3mΩ

Applications

- Synchronous Rectification for AC-DC Quick Charger

100% UIS Tested
100% R_g Tested

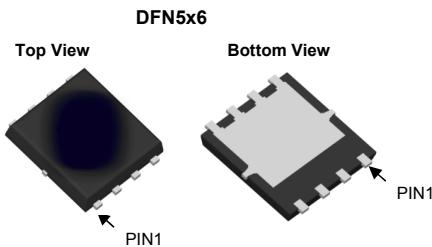

Orderable Part Number	Package Type	Form	Minimum Order Quantity
PW6268	DFN 5x6	Tape & Reel	3000

Absolute Maximum Ratings $T_A=25^\circ C$ unless otherwise noted

Parameter	Symbol	Maximum	Units
Drain-Source Voltage	V_{DS}	60	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current ^G	I_D	44	A
$T_C=100^\circ C$		44	
Pulsed Drain Current ^C	I_{DM}	176	
Continuous Drain Current	I_{DSM}	24	A
$T_A=70^\circ C$		20	
Avalanche Current ^C	I_{AS}	30	A
Avalanche energy $L=0.3mH$ ^C	E_{AS}	135	mJ
V_{DS} Spike	$10\mu s$	V_{SPIKE}	V
Power Dissipation ^B	P_D	56	W
$T_C=100^\circ C$		22	
Power Dissipation ^A	P_{DSM}	5	W
$T_A=70^\circ C$		3.2	
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to 150	°C

Thermal Characteristics

Parameter	Symbol	Typ	Max	Units
Maximum Junction-to-Ambient ^A $t \leq 10s$	$R_{\theta JA}$	20	25	°C/W
Maximum Junction-to-Ambient ^{AD} Steady-State		45	55	°C/W
Maximum Junction-to-Case	$R_{\theta JC}$	1.8	2.2	°C/W

Electrical Characteristics ($T_J=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	$\text{ID}=250\mu\text{A}, \text{V}_{\text{GS}}=0\text{V}$	60			V
I_{DSS}	Zero Gate Voltage Drain Current	$\text{V}_{\text{DS}}=60\text{V}, \text{V}_{\text{GS}}=0\text{V}$		1		μA
			$T_J=55^\circ\text{C}$		5	
I_{GSS}	Gate-Body leakage current	$\text{V}_{\text{DS}}=0\text{V}, \text{V}_{\text{GS}}=\pm20\text{V}$			±100	nA
$\text{V}_{\text{GS(th)}}$	Gate Threshold Voltage	$\text{V}_{\text{DS}}=\text{V}_{\text{GS}}, \text{I}_{\text{D}}=250\mu\text{A}$	1.3	1.8	2.3	V
$\text{R}_{\text{DS(ON)}}$	Static Drain-Source On-Resistance	$\text{V}_{\text{GS}}=10\text{V}, \text{I}_{\text{D}}=20\text{A}$		3.8	4.7	$\text{m}\Omega$
			$T_J=125^\circ\text{C}$		5.8	
		$\text{V}_{\text{GS}}=4.5\text{V}, \text{I}_{\text{D}}=20\text{A}$		4.9	6.3	
g_{FS}	Forward Transconductance	$\text{V}_{\text{DS}}=5\text{V}, \text{I}_{\text{D}}=20\text{A}$		91		S
V_{SD}	Diode Forward Voltage	$\text{I}_{\text{S}}=1\text{A}, \text{V}_{\text{GS}}=0\text{V}$		0.7	1	V
I_{S}	Maximum Body-Diode Continuous Current ^G				44	A
DYNAMIC PARAMETERS						
C_{iss}	Input Capacitance	$\text{V}_{\text{GS}}=0\text{V}, \text{V}_{\text{DS}}=30\text{V}, \text{f}=1\text{MHz}$		2520		pF
C_{oss}	Output Capacitance			670		pF
C_{rss}	Reverse Transfer Capacitance			65		pF
R_{g}	Gate resistance	$\text{f}=1\text{MHz}$	0.5	1.2	2	Ω
SWITCHING PARAMETERS						
$\text{Q}_{\text{g}}(10\text{V})$	Total Gate Charge	$\text{V}_{\text{GS}}=10\text{V}, \text{V}_{\text{DS}}=30\text{V}, \text{I}_{\text{D}}=20\text{A}$		44	65	nC
$\text{Q}_{\text{g}}(4.5\text{V})$	Total Gate Charge			21	30	nC
Q_{gs}	Gate Source Charge			6.5		nC
Q_{gd}	Gate Drain Charge			8.5		nC
$t_{\text{D(on)}}$	Turn-On DelayTime	$\text{V}_{\text{GS}}=10\text{V}, \text{V}_{\text{DS}}=30\text{V}, \text{R}_{\text{L}}=1.5\Omega, \text{R}_{\text{GEN}}=3\Omega$		7.5		ns
t_{r}	Turn-On Rise Time			6.5		ns
$t_{\text{D(off)}}$	Turn-Off DelayTime			38		ns
t_{f}	Turn-Off Fall Time			8		ns
t_{rr}	Body Diode Reverse Recovery Time	$\text{I}_{\text{F}}=20\text{A}, \text{di/dt}=500\text{A}/\mu\text{s}$		22		ns
Q_{rr}	Body Diode Reverse Recovery Charge	$\text{I}_{\text{F}}=20\text{A}, \text{di/dt}=500\text{A}/\mu\text{s}$		80		nC

A. The value of R_{QJA} is measured with the device mounted on 1 in² FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^\circ\text{C}$. The Power dissipation P_{DSM} is based on $R_{\text{QJA}} \leq 10\text{s}$ and the maximum allowed junction temperature of 150°C . The value in any given application depends on the user's specific board design.

B. The power dissipation P_D is based on $T_{J(\text{MAX})}=150^\circ\text{C}$, using junction-to-case thermal resistance, and is more useful in setting the upper dissipation limit for cases where additional heatsinking is used.

C. Single pulse width limited by junction temperature $T_{J(\text{MAX})}=150^\circ\text{C}$.

D. The R_{QJA} is the sum of the thermal impedance from junction to case R_{QJC} and case to ambient.

E. The static characteristics in Figures 1 to 6 are obtained using <300 μs pulses, duty cycle 0.5% max.

F. These curves are based on the junction-to-case thermal impedance which is measured with the device mounted to a large heatsink, assuming a maximum junction temperature of $T_{J(\text{MAX})}=150^\circ\text{C}$. The SOA curve provides a single pulse rating.

G. The maximum current rating is package limited.

H. These tests are performed with the device mounted on 1 in² FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^\circ\text{C}$.

THIS PRODUCT HAS BEEN DESIGNED AND QUALIFIED FOR THE CONSUMER MARKET. APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. YPW DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. YPW RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.



TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

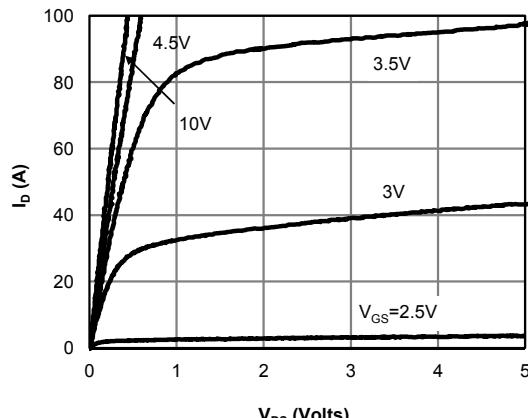


Figure 1: On-Region Characteristics (Note E)

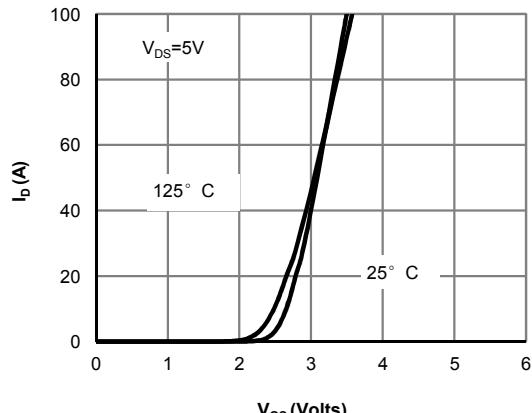


Figure 2: Transfer Characteristics (Note E)

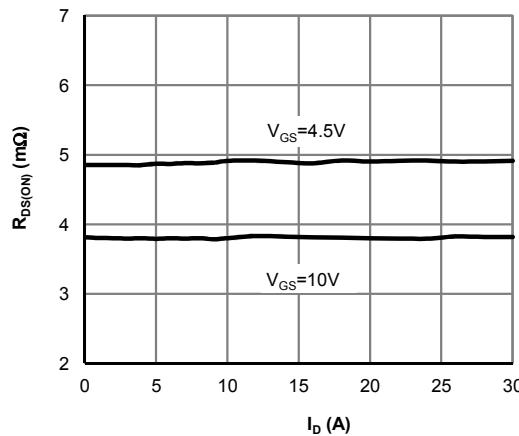


Figure 3: On-Resistance vs. Drain Current and Gate Voltage (Note E)

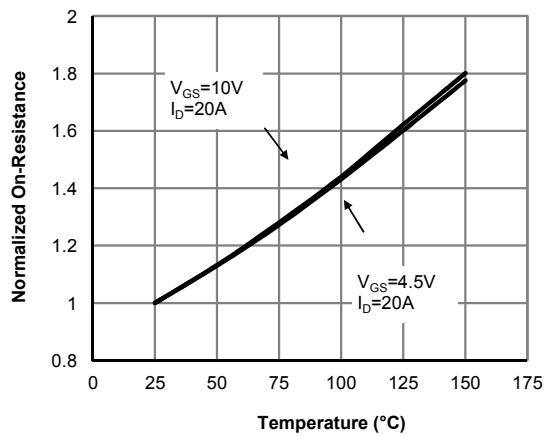


Figure 4: On-Resistance vs. Junction Temperature (Note E)

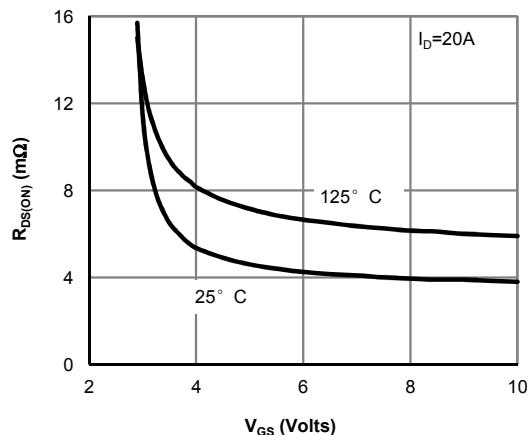


Figure 5: On-Resistance vs. Gate-Source Voltage (Note E)

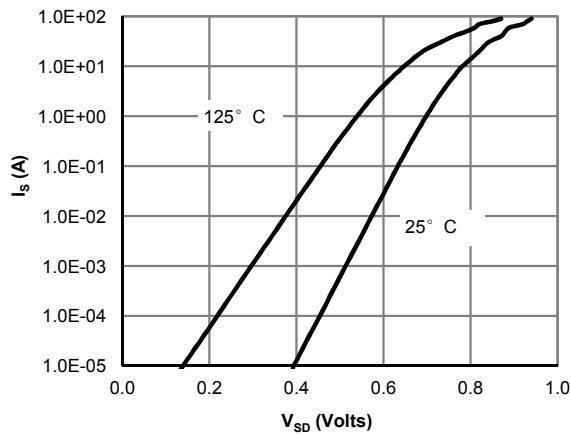


Figure 6: Body-Diode Characteristics (Note E)



TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

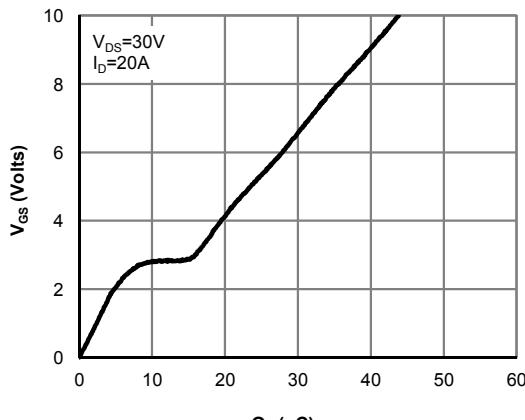


Figure 7: Gate-Charge Characteristics




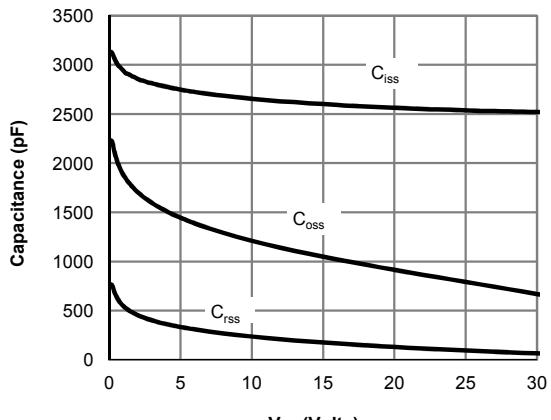


Figure 8: Capacitance Characteristics

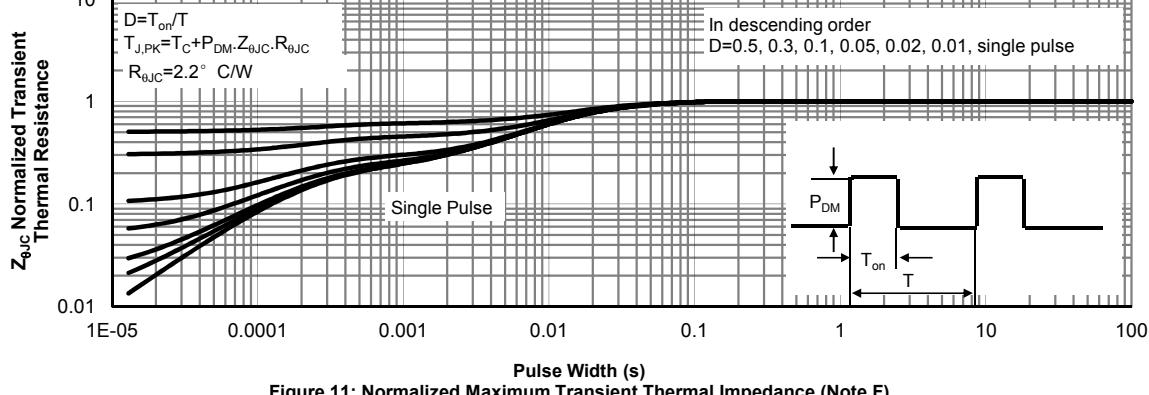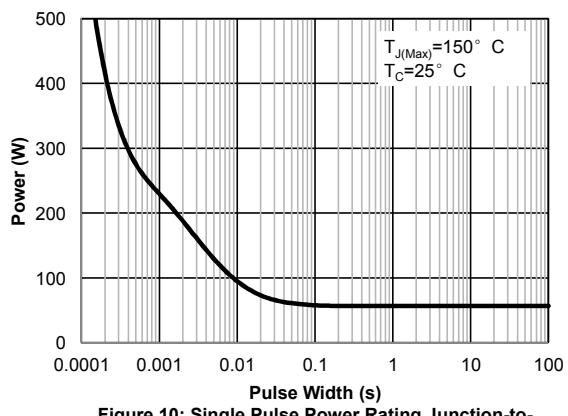

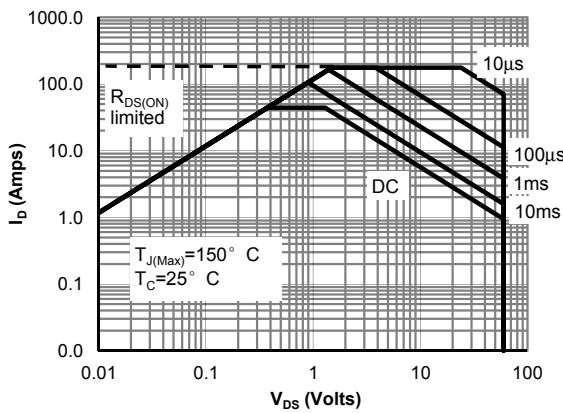

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

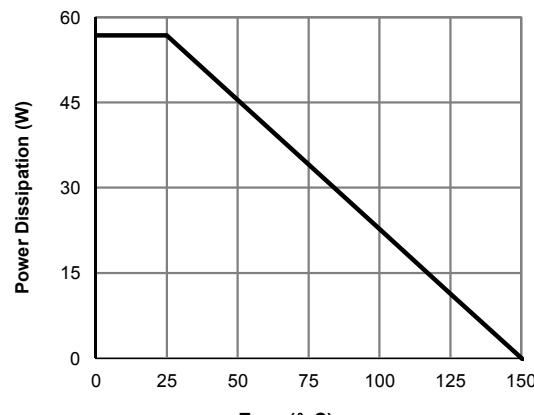


Figure 12: Power De-rating (Note F)

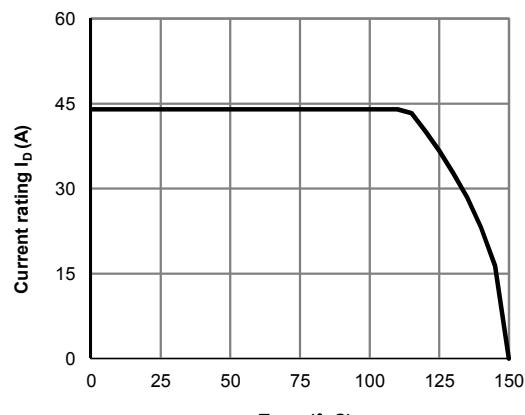


Figure 13: Current De-rating (Note F)

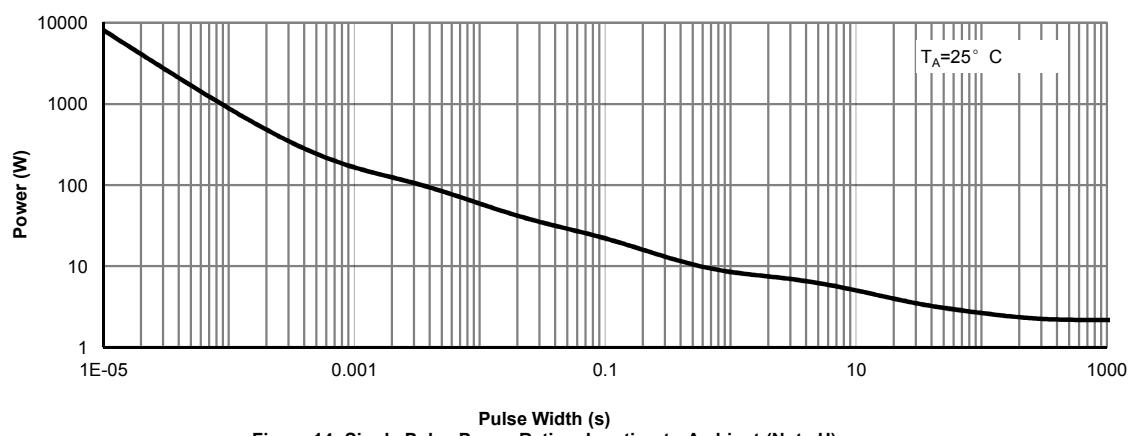


Figure 14: Single Pulse Power Rating Junction-to-Ambient (Note H)

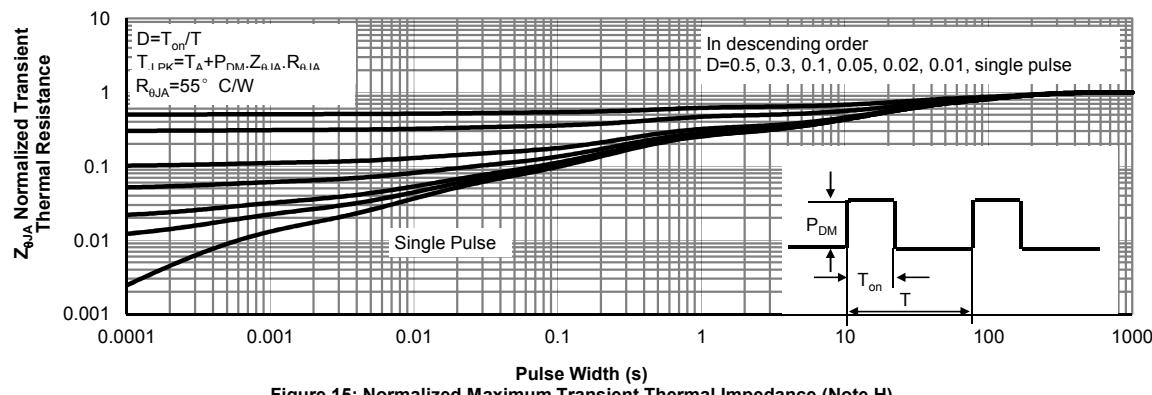


Figure 15: Normalized Maximum Transient Thermal Impedance (Note H)



Figure A: Gate Charge Test Circuit & Waveforms

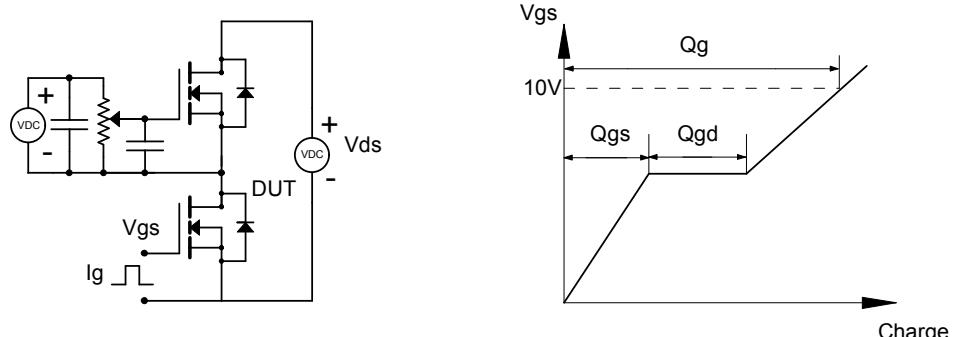


Figure B: Resistive Switching Test Circuit & Waveforms

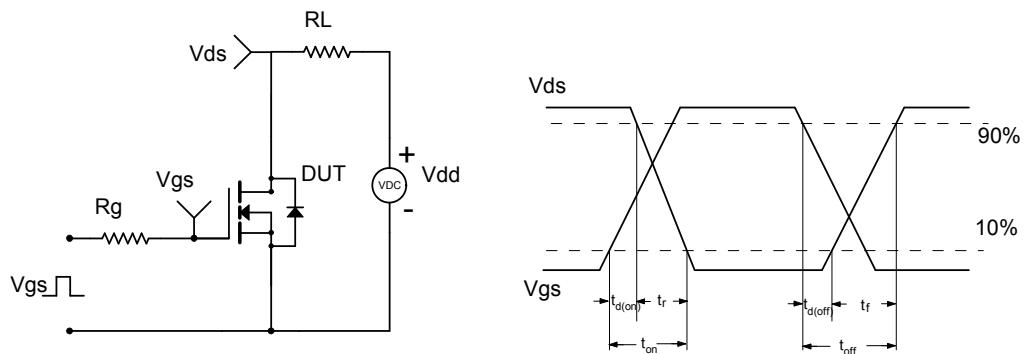


Figure C: Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

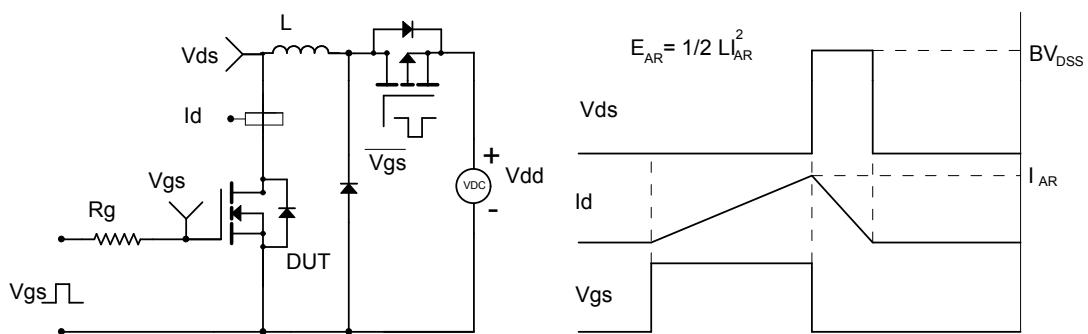


Figure D: Diode Recovery Test Circuit & Waveforms

